


### Overview

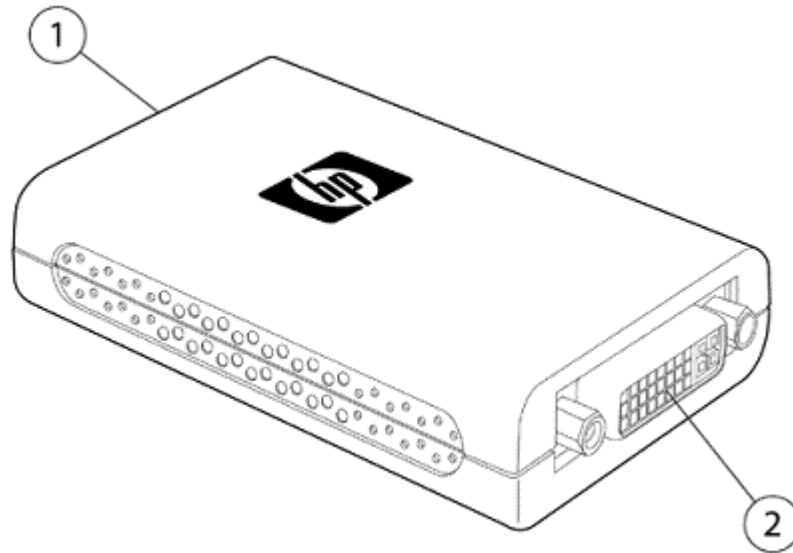

**1. (not shown). USB connector:** For connecting to a display source via a USB cable.

**2. DVI-I connector.** Allows digital or analog output to the display.

---

### Model

NL571AA

---

### Introduction

HP offers a variety of optional products (each sold separately) designed to complement our monitors and enhance the overall computing experience. The super-compact HP USB Graphics Adapter enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications.

---

### Compatibility

HP Compaq 4000 Pro SFF, HP Compaq 6000 Pro MT, HP Compaq 6000 Pro SFF, HP Compaq 4300 Pro SFF, HP Compaq 4300 Pro AiO, HP Compaq 6005 Pro MT, HP Compaq 6005 Pro SFF, HP Compaq 6005 Pro USDT, HP Compaq 6300 Pro MT, HP Compaq 6300 Pro SFF, HP Compaq 6300 Pro AiO, HP Compaq 8300 Elite CMT, HP Compaq 8300 Elite MT, HP Compaq 8300 Elite SFF, HP Compaq 8300 Elite USDT, HP Compaq 8300 Pro AiO, HP Compaq 6305 Pro MT, HP Compaq 6305 Pro SFF, HP TouchSmart 9100, HP TouchSmart 9300 Elite, HP rp3000 Point of Sale System, and HP rp5700 Retail System.

**NOTE:** Please check this product's web page on [HP.com](http://HP.com) for current compatibility information.

See minimum system requirements below.

**NOTE:** Not compatible with devices that use the Intel® Atom™ processor.

### Overview

#### A variety of uses

Build a wall of tiled displays or use several monitors with a notebook or desktop PC on the desk. The HP USB Graphics Adapter can help boost productivity and flexibility in a variety of settings:

- **Office:** View large spreadsheets across two screens or multitask without overlapping windows
- **On the road:** Enable multiple screen presentations from one PC
- **Graphics houses:** Use a second display for palettes or tools or a panoramic view of large documents
- **Editing:** Edit documents on one screen and reference data on another; compare multiple documents simultaneously
- **Financial:** Use one monitor for each data stream

### Technical Specifications

<b>Host Interface</b>	USB 2.0
<b>Video interface</b>	VGA or DVI-I
<b>Connectors</b>	Video output: VGA HDDE 15pin Female Connector or DVI-I 24pin + 5pin Female Connector Host upstream link: USB Mini-B Type Female Connector
<b>Connectivity</b>	Up to 6 adapters on a computer
<b>Power Mode</b>	Bus-powered
<b>Supported Modes</b>	Extend (Default), Mirror, Primary Display
<b>Supported resolutions</b>	Up to 1920 x 1080 (widescreen) or 1600 x 1200 (traditional)
<b>USB Cable</b>	USB A -Type Male to 5pin Mini USB B-Type Male, 3.28 ft (1 m)
<b>Operating Temperature</b>	10-40°C (50-104°F)
<b>Storage Temperature</b>	-10~80°C (14~176°F)
<b>Relative Humidity</b>	< 85% non-condensing
<b>System Requirements</b>	<b>Software</b> Microsoft® Windows® 7 with Service Pack 1 (32-bit or 64-bit), Windows Vista® with Service Pack 1 (32-bit or 64-bit), Microsoft® Windows® XP Home or Professional with Service Pack 3 <b>Hardware</b> The driver will run on processors ranging from Atom N270 based PCs, basic single Core CPUs, and of course the latest Dual, Quad Core and Core i3/i5/i7 CPUs. 512 MB RAM for a single attached monitor, 1 GB for two attached monitors, and more for additional attached monitors At least one USB 2.0 port 30 MB of available disk space Super VGA (800 x 600) or higher-resolution video adapter and monitor CD-ROM or DVD drive if installing from a CD or network access if installing from a network <b>NOTE:</b> Graphics Card Support (Windows Vista/Windows 7) On Windows Vista and Windows 7, DisplayLink software interacts closely with the primary graphics card. DisplayLink support and test a single graphics card (GPU) installed in a PC from all major GPU vendors (Intel, ATI, NVidia and Via). SIS graphics cards are not supported. The following GPU configurations may exhibit compatibility issues on Windows 7 and Vista in certain circumstances: NVIDIA SLI in SLI mode Other GPU configurations, including the following, are currently unsupported and will not function on Windows 7/Vista: <ul style="list-style-type: none"><li>● Crossfire</li><li>● SLI not in SLI mode</li><li>● Multiple WDDM 1.1 graphics drivers active at once</li></ul> <b>NOTE:</b> Not compatible with devices that use the Intel® Atom™ processor.
<b>Mechanical</b>	<b>Dimensions (H x W x L)</b> <b>Unpackaged:</b> 0.71 x 2.13 x 3.1 in (1.8 x 5.4 x 8.4 cm)

### Technical Specifications

<b>Environmental</b>	<b>EMC</b>	FCC Part 15 Class B, IC ICES-003 CE (EN55022, EN61000, EN55024)
	<b>RoHS</b>	RoHS Compliant
<b>Components</b>	HP USB Graphics Adapter, USB Cable, DVI to VGA Adapter, Driver and Documentation CD, Quick Installation Guide	
<b>Limited warranty</b>	The HP USB Graphics Adapter has a one-year limited warranty when purchase separately as an AMO. Technical support is available seven days a week, 24 hours a day, by phone, as well as online support forums. Certain restrictions and exclusions apply.	

---

© 2009, 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows, Windows 7, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.. Intel and Core are trademarks of Intel Corporation in the U.S. and other countries.