# QuickSpecs

Overview



**Single Monitor Arm**



**Single Monitor Arm Clamp**
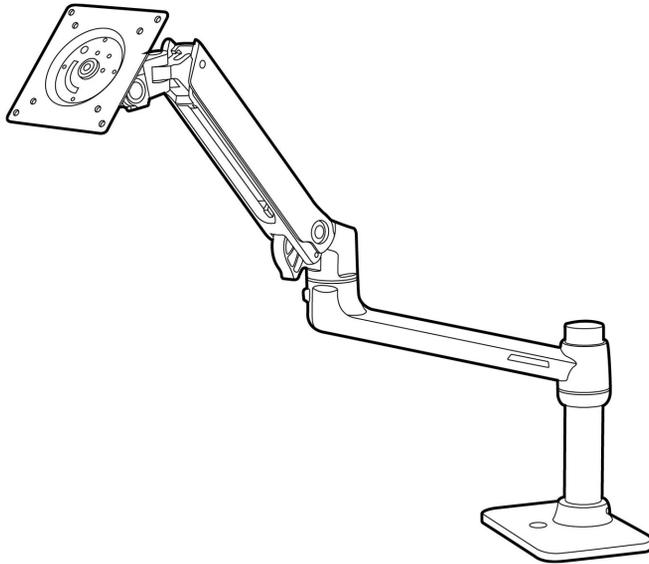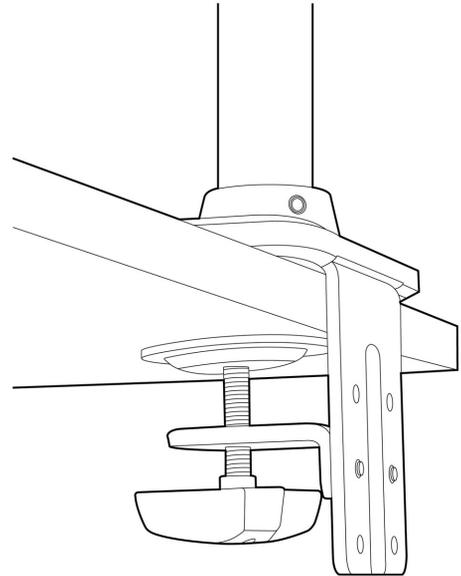
## Models

HP Single Monitor Arm                                                                                           BT861AA

## Introduction

The HP Single Monitor Arm is the perfect desk accessory for your work life. Sleek and streamlined, the HP Single Monitor Arm is designed to complement the way you work.

The HP Single Monitor Arm comes with a sturdy base and clamp, which attaches to the edge of your desk or worktable. It includes convenient cable management to route cables under the arm and out of the way, and to help reduce cable clutter on your workspace. It also provides a range of display adjustments including 13 inches of lift, 75 degrees of tilt, and 360 degrees of pan and rotation, so you can adjust the height and angle of your monitor. Connect the monitor to your laptop or desktop PC, and stay comfortable and productive throughout the day.

HP provides a portfolio of professional-grade accessories to help you achieve your business goals, increase productivity and lower your costs. All HP accessories go through rigorous testing and are certified to work seamlessly with your HP Desktop, Notebook, or All-in-One PC. They are backed up by HP's world-class support.

## Key Benefits

- Space saving design frees up valuable desk space
- Supports up to one 24" diagonal display
- Flexible arm adjusts to your size, posture and work preference
- Locate the arm wherever it is most convenient for you on a desk, and secure then it with the adjustable clamp

# QuickSpecs

Overview

## Compatibility

Compatible with the following All-in-One Business PCs:
HP ProDesk 800 G1 All-in-One*
HP ProOne 600 G1 All-in-One*
HP Compaq 8300 Pro All-in-One*
HP Compaq 6300 Pro All-in-One*

*Touch models not supported
**NOTE:** Not all models are available in all regions.

## Compatible Monitors

| | | |
|---|---|---|
| **ProDisplayMonitors** | HP Compaq LE1711 17-inch LCD Monitor | EM886A |
| | HP Compaq LE1901wl 19-inch LED Backlit LCD Monitor | XL877AA |
| | HP Compaq LE1911 17-inch LCD Monitor | EM887A |
| | HP Compaq LE2202x | LL649A |
| | HP ProDisplay P221 21.5-inch LED Backlit Monitor | C9E49AA |
| **EliteDisplay Monitors** | HP Compaq LA2205wg 22-inch Widescreen LCD Monitor | NM274A |
| | HP Compaq LA1751g 17-inch LCD Monitor | EM889A |
| | HP Compaq LA2006x | XN374A |
| | HP Compaq LA2206x | XN376A |
| | HP Compaq LA2306x | XN375A |
| | HP Compaq LA2405x | A9P21AA |
| | HP EliteDisplay E231 23-inch LED Backlit Monitor | C9V75AA |
| **Performance Monitors** | HP ZR2240w 21.5-inch LED Backlit IPS Monitor | XW475A4, XW475A8 |
| | HP ZR2440w 24-inch LED Backlit IPS Monitor | XW477A4, XW477A8 |
| | HP Z22i 21.5-inch IPS Display | D7Q14A4, D7Q14A8, D7Q14AS, D7Q14AT |
| | HP ZR2330w 23-inch IPS LED Backlit Monitor | C6Y18A4, C6Y18A8, C6Y18AS, C6Y18AT |
| | HP Z23i 23-inch IPS Display | D7Q13A4, D7Q34A8, D7Q13AS, D7Q13AT |

# QuickSpecs

HP Single Monitor Arm

## Overview

| Specialty Monitors | HP Compaq L2311c | A1W80AA |
| --- | --- | --- |
| | HP L2401x 24-inch LED Backlit Monitor | B6R21AA |
| | HP Compaq LA2206xc 21.5-inch Webcam LCD Monitor | LW490AA |
| | HP Compaq L2311c | A1W80AA |

| Touch Series Monitors | HP Compaq L2206tm | B0L55AA |
| --- | --- | --- |

## Service and Support

One-year limited warranty. Additional support is available 24 hours a day, seven days a week by phone as well as online support forms.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

## Technical Specifications

| HP Single Monitor Arm | Basic Product Specifications | Assumed Display Size | Supports displays up to 24 in (60.96 cm) |
| --- | --- | --- | --- |
| | | Assumed Weight of Display | Supports displays weighing 7–20 lbs (3.1–9.1 kg) * Monitor depth greater than 2 in (5 cm) may diminish capacity. |
| | | VESA Configuration | MIS-D Mounting Standards: VESA FDMI, MIS-D, 75/100, C (hole pattern = 100 x 100 mm & 75 x 75 mm) |
| | | Desk Mounting Configuration | Desk Clamp attaches to surface edge 0.4 in to 2.4 in (10 to 60 mm) thick; Grommet Mount attaches through surface holes 0.31 in to 2 in (8 to 50 mm) wide and up to 3 in(76 mm) thick |
| | | Add-Ons – Soundbar, Non-Standard Cables, etc. | None assumed |
| | Product Features | Tilt Adjustment Range | 75° Total Range (+70° rear / -5° front) |
| | Height Adjustment Range | 13 inches (330mm) | |
| | Landscape to Portrait | 360° P/L | |
| | Landscape to Portrait Detent | None | |
| | Side to Side Pan | Pans at pole 360°; pans at extension 360°; pans at monitor 180° | |
| | Arm Extension | Extends/retracts LCD up to 25.6 in (650 mm) | |
| | Quick Release Mechanism | None | |
| | Tilt Lock Feature | None | |
| | Cable Management Feature | Cable management feature included underneath the lift arm and extension arm | |
| | Weight Adjustment Feature | End user weight adjustment feature included | |
| | Product Finish | HP Black | |
| | Safety, Testing and Environmental | Product Storage and Transportation | −4° to +140° F (−20° to +60° C) |

DA - 13710  Worldwide — Version 13 — August 17, 2013
Page 3

# QuickSpecs

HP Single Monitor Arm

## Overview

| Specialty Monitors | HP Compaq L2311c | A1W80AA |
| --- | --- | --- |
| | HP L2401x 24-inch LED Backlit Monitor | B6R21AA |
| | HP Compaq LA2206xc 21.5-inch Webcam LCD Monitor | LW490AA |
| | HP Compaq L2311c | A1W80AA |

| Touch Series Monitors | HP Compaq L2206tm | B0L55AA |
| --- | --- | --- |

## Service and Support

One-year limited warranty. Additional support is available 24 hours a day, seven days a week by phone as well as online support forms.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

## Technical Specifications

| HP Single Monitor Arm | Basic Product Specifications | Assumed Display Size | Supports displays up to 24 in (60.96 cm) |
| --- | --- | --- | --- |
| | | Assumed Weight of Display | Supports displays weighing 7–20 lbs (3.1–9.1 kg) * Monitor depth greater than 2 in (5 cm) may diminish capacity. |
| | | VESA Configuration | MIS-D Mounting Standards: VESA FDMI, MIS-D, 75/100, C (hole pattern = 100 x 100 mm & 75 x 75 mm) |
| | | Desk Mounting Configuration | Desk Clamp attaches to surface edge 0.4 in to 2.4 in (10 to 60 mm) thick; Grommet Mount attaches through surface holes 0.31 in to 2 in (8 to 50 mm) wide and up to 3 in(76 mm) thick |
| | | Add-Ons – Soundbar, Non-Standard Cables, etc. | None assumed |
| | Product Features | Tilt Adjustment Range | 75° Total Range (+70° rear / -5° front) |
| | Height Adjustment Range | 13 inches (330mm) | |
| | Landscape to Portrait | 360° P/L | |
| | Landscape to Portrait Detent | None | |
| | Side to Side Pan | Pans at pole 360°; pans at extension 360°; pans at monitor 180° | |
| | Arm Extension | Extends/retracts LCD up to 25.6 in (650 mm) | |
| | Quick Release Mechanism | None | |
| | Tilt Lock Feature | None | |
| | Cable Management Feature | Cable management feature included underneath the lift arm and extension arm | |
| | Weight Adjustment Feature | End user weight adjustment feature included | |
| | Product Finish | HP Black | |
| | Safety, Testing and Environmental | Product Storage and Transportation | −4° to +140° F (−20° to +60° C) |

## Overview

| | | |
|---|---|---|
| **Specifications** | **Temperature** | |
| | **Operating Temperature** | 32° to 104° F (0° to 40° C) |
| | **Safety Considerations** | Engineered to meet Ergotron's workmanship standard for safety. |
| | **Regulatory/Usability/ Environmental Requirements** | RoHS – Standard |
| | **Product Testing Procedure & Design Standard** | The product testing procedure & design standard will be determined, documented and monitored by Ergotron. |
| | **Operating Life** | NA |
| **Manuals and Accessories** | **Install guides and warranty info requirements** | None |
| | **Accessory Kits** | Includes desk clamp and grommet mount accessory kits |